




SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-1	2-3

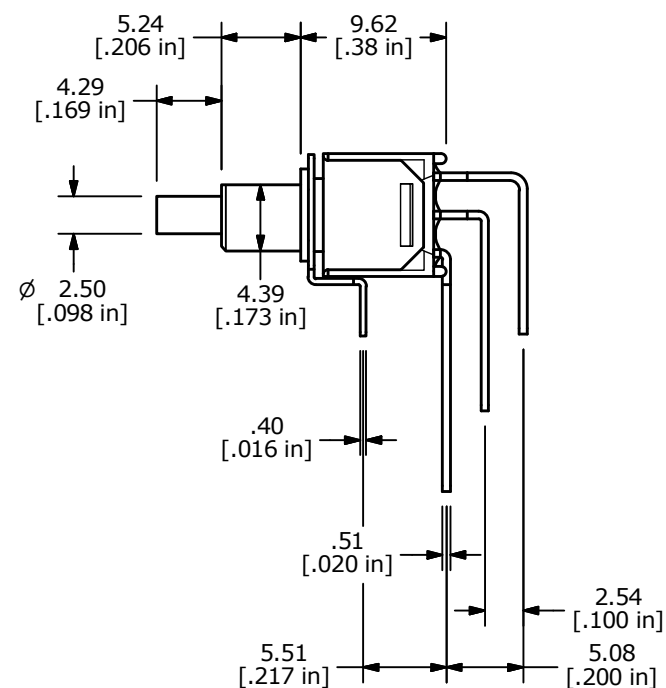

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 3A @ 120VAC or 28VDC, 1A @ 250VAC
6. MECHANICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
7. CONTACT RESISTANCE: R=20 m Ω max., Q=50 m Ω max.
8. INSULATION RESISTANCE: 1,000 m Ω min. @ 1000VDC.
9. ELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. OPERATING FORCE: 350 $\pm$ 100g.
12. TRAVEL: Electrical Make: 1.34 $\pm$ 0.25mm / Full travel: 1.88 $\pm$ 0.30mm
13. ▲ DENOTES CRITICAL PARAMETER.

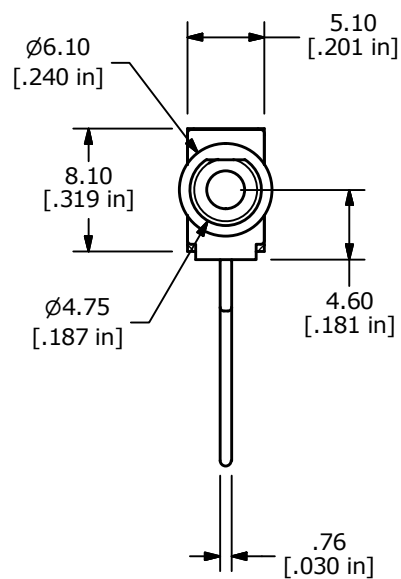

E-SWITCH®

B	24159	update Travel note	1/23/20	MW
A	22046	New Release	12/14/15	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 800CSP1B6M7QE

SCALE
2:1DATE
11/10/2015DR
rcDWG
T835003REV
B