


### Heat shrinkable tubing adhesive lined - 1.2 m lengths

#### TA42 - thin wall, 4:1 shrink ratio

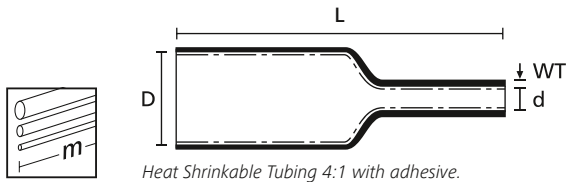

| TYPE       | Supplied<br>Ø D min. | Recov.<br>Ø d max. | Wall<br>(WT) | Length<br>(L) | Colour     | Shrink<br>Ratio | Tools | Article-No. |
|------------|----------------------|--------------------|--------------|---------------|------------|-----------------|-------|-------------|
| TA42-4/1   | 4.0                  | 1.0                | 1.00         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-40400   |
| TA42-8/2   | 8.0                  | 2.0                | 1.20         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-40800   |
| TA42-12/3  | 12.0                 | 3.0                | 1.40         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-41200   |
| TA42-16/4  | 16.0                 | 4.0                | 1.80         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-41600   |
| TA42-24/6  | 24.0                 | 6.0                | 2.25         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-42400   |
| TA42-32/8  | 32.0                 | 8.0                | 2.55         | 1.2 m         | Black (BK) | 4:1             | 30-32 | 318-43200   |
| TA42-52/13 | 52.0                 | 13.0               | 2.55         | 1.2 m         | Black (BK) | 4:1             | -     | 318-45200   |

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.

| Recommended Tools |             |             |             |
|-------------------|-------------|-------------|-------------|
|                   | 30<br>H5002 | 31<br>H5004 | 32<br>E4500 |
|                   | 568         | 568         | 567         |

For more information on toolings please refer to the  
Application Tooling chapter.