
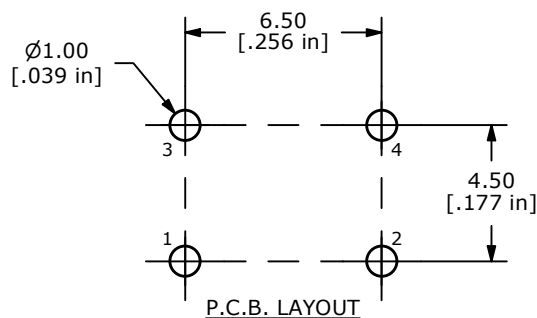


NOTES:



1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 $\pm$ 50 gf
6. TRAVEL: 0.25mm +0.10/-0.10mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
- ▲ 11. HOUSING AND ACTUATOR TO MEET UL-94VO STANDARD
12. OPERATING TEMPERATURE: -40°C TO 85°C

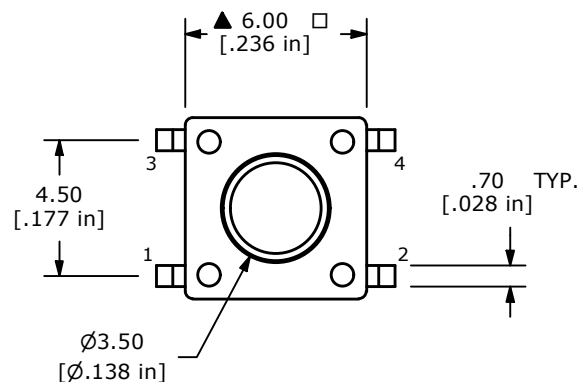

▲ ACTUATOR COLOR: BLACK
MATERIAL: PPS, UL94-VO

▲ COVER MATERIAL:
SILVER TIN PLATED

▲ CASE COLOR: BLACK
MATERIAL: PPS, UL94-VO

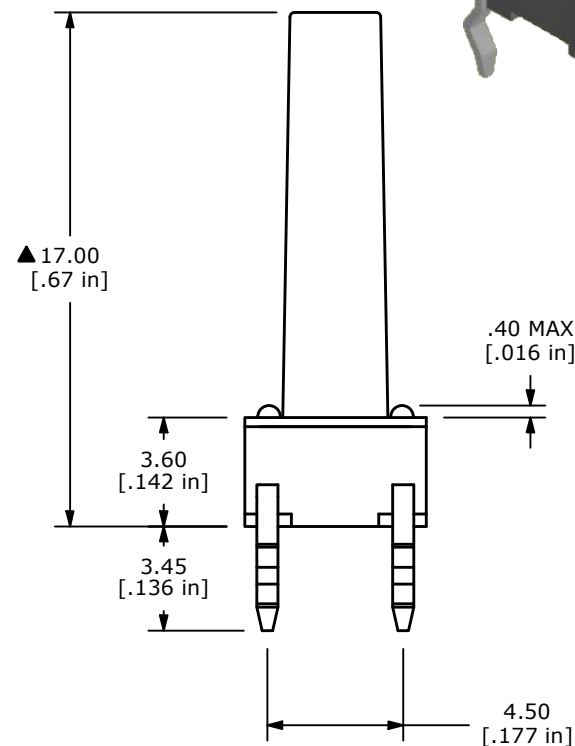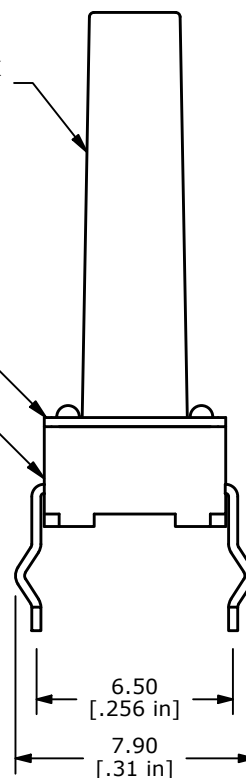

C	24545	CHANGED OPERATING TEMPERATURE	10/19/20	JM
B	22154	Redrawn in new format	2/9/16	MW
A	10466	RELEASED FOR PRODUCTION	12/13/99	MM
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1105LF160QUL94V0

SCALE
4:1

DATE
12/13/1999

DR
MM

DWG
P010035

REV
C