


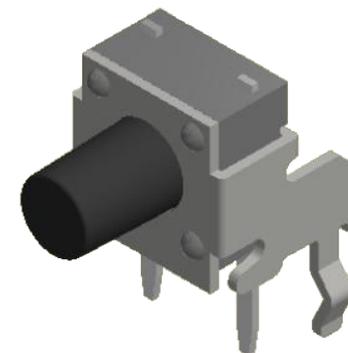


▲ ACTUATOR  
COLOR: BLACK

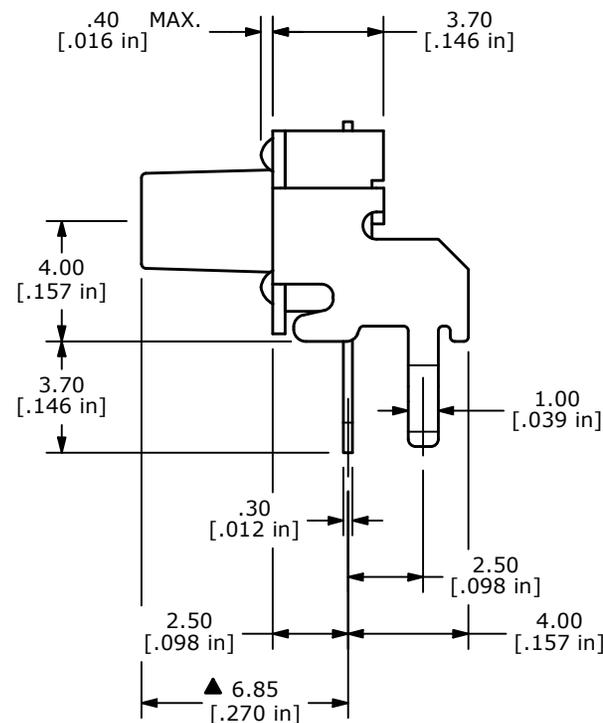

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160  $\pm$  50 gf
6. TRAVEL: 0.25 +0.2/-0.1 mm
7. CONTACT RESISTANCE: 50 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. MATERIAL: CONTACTS: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
- ▲ 11. ACTUATOR COLOR: BLACK
- ▲ 12. HOUSING & ACTUATOR: TO MEET UL-94V0 STANDARD
13. OPERATING TEMP: -40°C TO 85°C

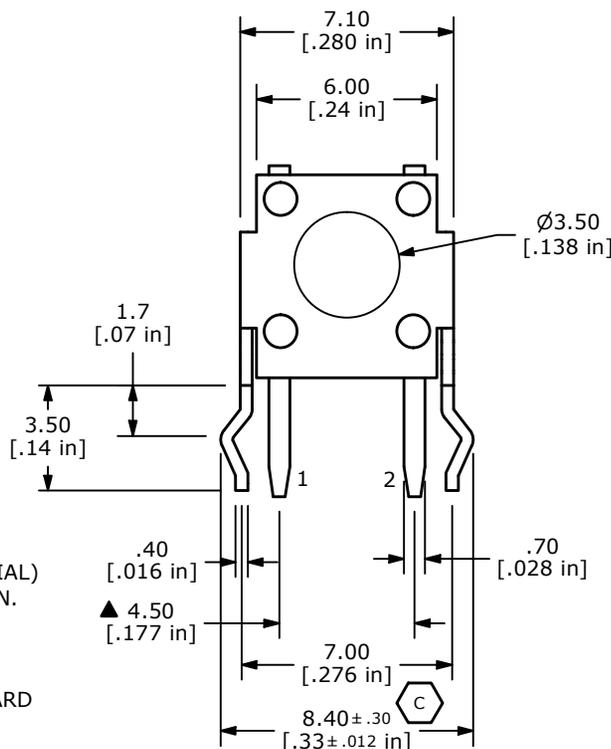

F	24550	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM
E	19094	ADD COLOR FOR HOUSING, ACTUATOR	5/24/10	BLR
D	18128	ONE TOLERANCE WAS +/- 0.1	6/9/08	BLR
C	15828	CHANGE WORDING IN NOTE 11	3/1/06	PH
B	15794	ADD NOTE 11	2/20/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE TL1105MF160Q94V0

SCALE	DATE	DR	DWG	REV
4:1	5/24/2010	BLR	P020236	F

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED