


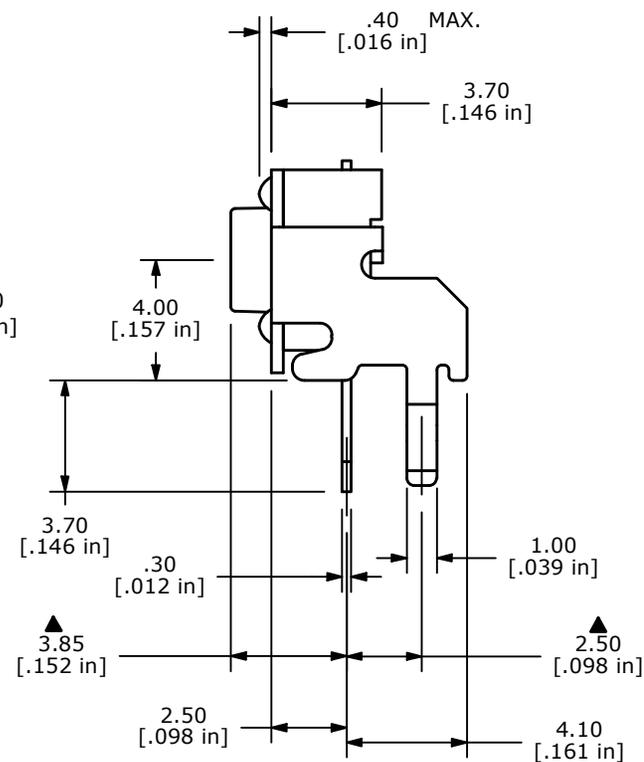


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 12VDC, 50mA
- ▲ 6. OPERATING FORCE: 250 ± 50 gf
7. TRAVEL: 0.25 +0.2/-0.1 mm
8. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
9. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
10. ▲ DENOTES CRITICAL PARAMETER
- ▲ 11. MATERIAL: HIGH TEMPERATURE PLASTIC
12. OPERATING TEMP: -40°C TO 85°C

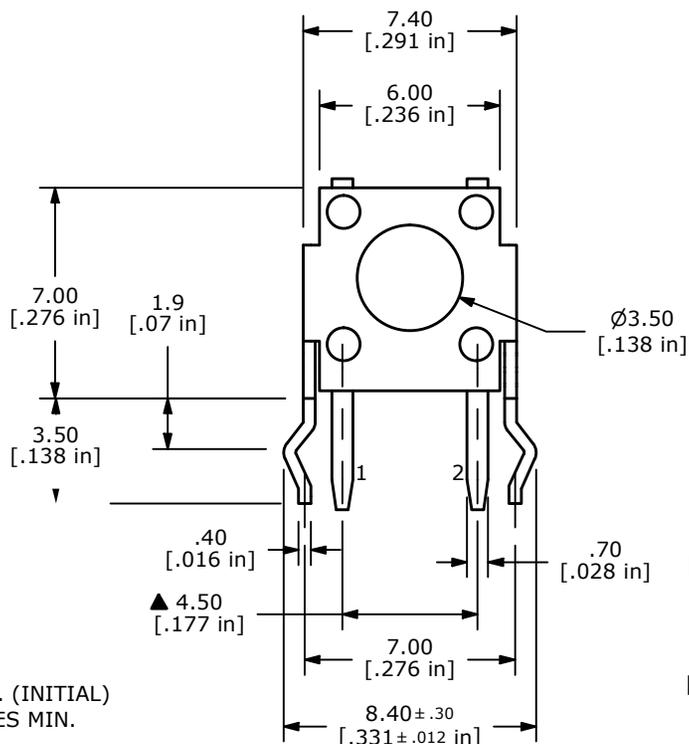

▲ ACTUATOR
COLOR: IVORY

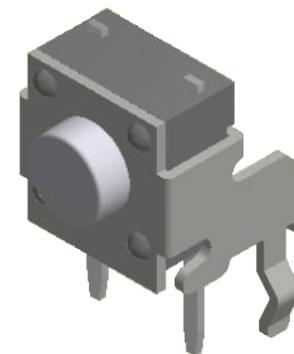

C	24549	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM
B	22187	UPDATED NOTES 4,9, AND 12	3/8/16	MR
A	20042	RELEASED FOR PRODUCTION	07/01/11	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1105VF250QHT				
SCALE 4:1	DATE 7/1/2011	DR BMA	DWG P010467	REV C