


RECOMMENDED P.C.B. LAYOUT





SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1,5-4	2-3,5-6

(ON) = MOMENTARY



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x=±0.4mm
x.xx=±0.25mm
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A @30VDC
5. TRAVEL: 2.50±0.38mm
6. OPERATING FORCE: 180±50 GRAMS
7. CONTACT RESISTANCE: 100mΩ MAX.
8. ELECTRICAL LIFE: >10,000 CYCLES
9. ▲ DENOTES CRITICAL PARAMETER
10. 2011/65/EU (ROHS) COMPLIANT

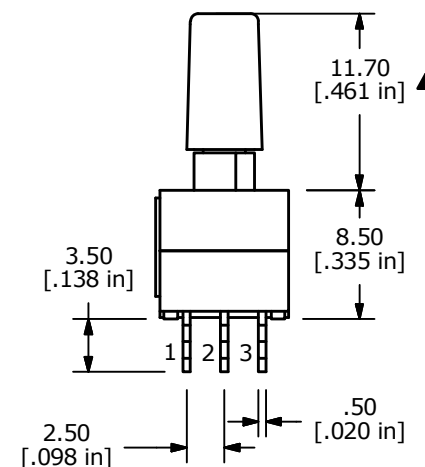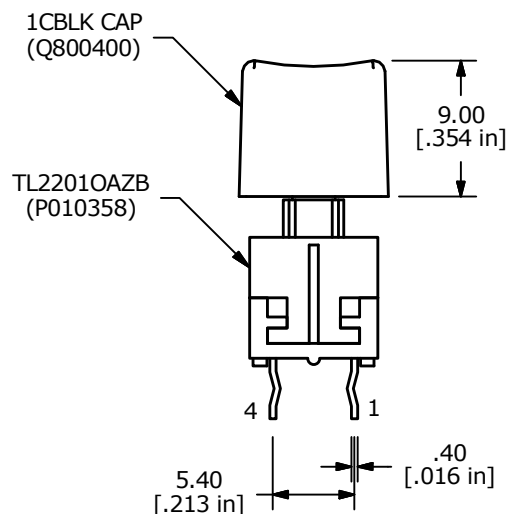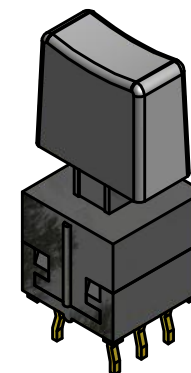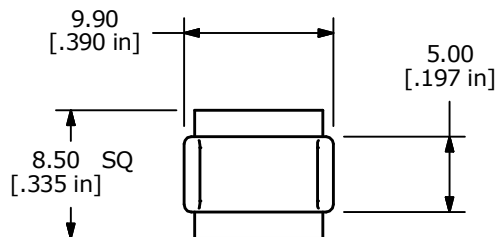

B	22326	UPDATED POS. 2 SWITCH FUNCTION	5/24/16	MJR
A	21367	NEW PART RELEASE	1/30/14	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL2201OAZB1CBLK

SCALE 2:1

DATE 1/30/2014

DR EBP

DWG XP0318A

REV B