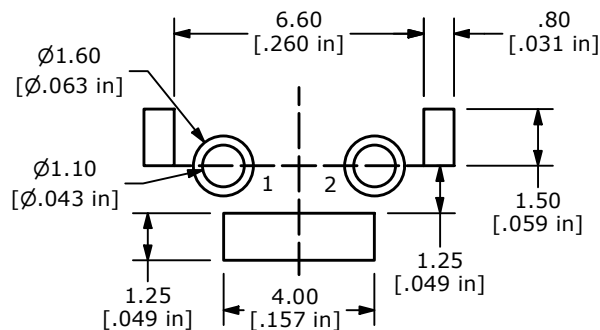




RECOMMENDED P.C.B. LAYOUT

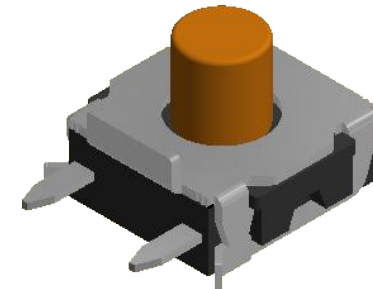
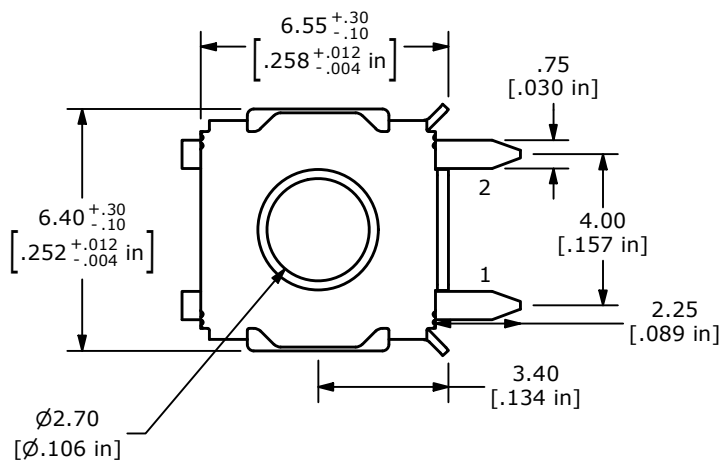
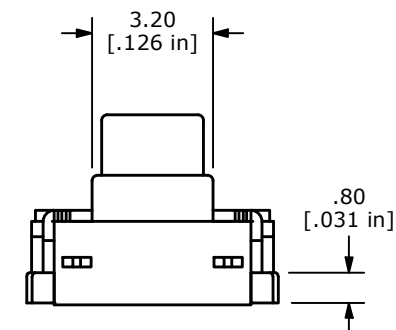
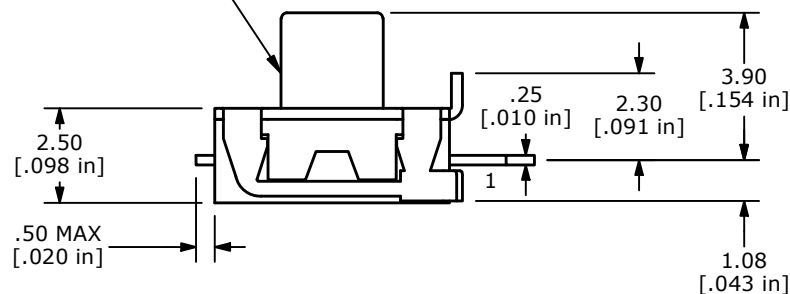


CIRCUIT: SPST

OFF - (ON) ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
4. FUNCTION: SPST
5. RATING: 50mA @ 32VDC
- ▲ 6. OPERATING FORCE: 350 $\pm$ 100gf
7. TRAVEL: 0.5 mm
8. CONTACT RESISTANCE: 100 m Ω MAX
- ▲ 9. CONTACT MATERIAL: SILVER
10. DIELECTRIC STRENGTH: 250VAC for 1 min
11. INSULATION RESISTANCE: 10 MEGA Ω min, @ 100VDC
12. ELECTRICAL LIFE: 300,000 CYCLES
13. ▲ DENOTES CRITICAL PARAMETER
14. OPERATING TEMP: -40°C to 85°C
15. PACKAGING: TAPE & REEL 550 PCS

▲ ACTUATOR
COLOR: ORANGE

E-SWITCH®

TITLE TL6155AF350Q

SCALE
5:1DATE
1/5/2021DR
JMDWG
N615501REV
A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED