
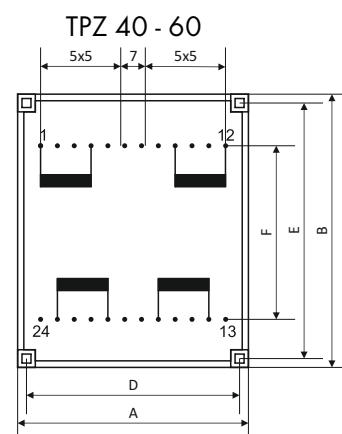
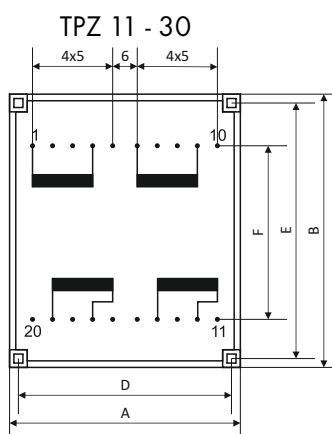



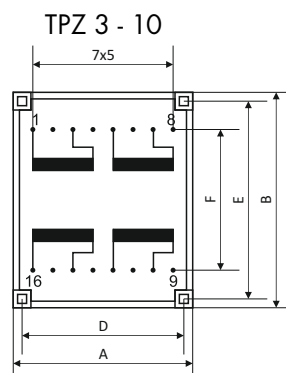

Rated power: **3 - 30VA**
 Rated voltage PRI: **24 - 400V 50/60Hz**
 Rated voltage SEC: **4 - 400V**

Transformers for printed circuit boards designed mainly for building into power supply systems of electronic devices. They feature a very small height and a compact build as well as having an increased mechanical durability and resilience to climate elements (cast resin). The transformers are made at IP00 protection grade, maximum ambient temperature 70°C, thermal class of insulation B (130°C). Manufactured in compliance with EN61558-2-4 and EN61558-2-6.

Type	Power	Dimensions [mm]						Weight [kg]	Typical leads	
	[VA]	A	B	C	D	E	F		PRI	SEC
TPZ 3	3	44	53	17	37,5	47,5	35	0,12	1-3, 5-7	10-12, 14-16
TPZ 4	4	44	53	19	37,5	47,5	35	0,15	1-3, 5-7	10-12, 14-16
TPZ 6	6	44	53	22	37,5	47,5	35	0,18	1-3, 5-7	10-12, 14-16
TPZ 10	10	44	53	28	37,5	47,5	35	0,26	1-3, 5-7	10-12, 14-16
TPZ 11	11	57	68	22	50	62,5	45	0,28	1-4, 6-9	12-14, 17-19
TPZ 14	14	57	68	24	50	62,5	45	0,32	1-4, 6-9	12-14, 17-19
TPZ 18	18	57	68	27	50	62,5	45	0,38	1-4, 6-9	12-14, 17-19
TPZ 24	24	57	68	31	50	62,5	45	0,48	1-4, 6-9	12-14, 17-19
TPZ 30	30	57	68	35	50	62,5	45	0,54	1-4, 6-9	12-14, 17-19
TPZ 40	40	71	84	39	60	75	52,5	0,78	1-4, 9-12	14-17, 20-23
TPZ 50	50	71	84	48	60	75	52,5	1,10	1-4, 9-12	14-17, 20-23
TPZ 60	60	71	84	48	60	75	52,5	1,10	1-4, 9-12	14-17, 20-23