


**KEMET Part Number: Z0603C601FSMST**  
(Z0603C601FSMST)



KEMET, Z-SMS, Ferrite Beads, Noise Suppression, 270 mOhms

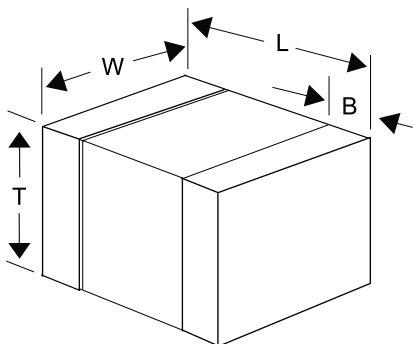

**Dimensions**

Chip Size	0603
L	1.6mm +/-0.15mm
W	0.8mm +/-0.15mm
T	0.8mm +/-0.15mm
B	0.3mm +/-0.2mm

**Packaging Specifications**

Packaging:	T&R
Packaging Quantity:	4000

**General Information**

Series:	Z-SMS
Style:	SMD Chip
Description:	Chip Bead Signal Line
Features:	Reduced DC Resistance Version For Noise Countermeasures Around LSI Power Supplies
RoHS:	Yes
Notes:	Internal Silver Printed Layer Creates A Closed Circuit Which Acts As A Magnetic Shield To Minimize Heat Generation And Crosstalk
Miscellaneous:	DCR Tolerance: 30%

**Specifications**

Impedance:	600 Ohms (100 mHz)
Impedance Tolerance:	25%
Ripple Current:	350 mA (MAX)
Temperature Range:	-55/+125°C
Resistance:	0.27 Ohms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

