Spring-loaded test probe

GKS-112 319 180 A 1502 M

Item GKS-112-1778







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









General data

Product group: Screw-in test probe Sub-product group: Screw-in test probe GKS-112 M screw-in Series: Grid: 2.54 mm [100 mil] Contacting from: Pin, posts Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes

Adjustable installation height: Non-rotating: Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-112 M - 40 °C [- 104 °F] Min. temperature:

+ 80 °C [+ 176 °F] Max. temperature: RoHS-compliant: RoHS-3;6c

Electrical data

Current load capacity / rated current: 8 A Typical resistance (Ri): <20 mOhm

Mechanical data

Total length: 35.8 mm [1.40 in] Barrel diameter: 1.65 mm [.064 in] 5.3 mm [.208 in] Maximum stroke: Spring pre-load: 0.5 N [1.79 ozf] Collar height: 1.5 N [5.39 ozf] Spring force at working stroke: Recommended working stroke: 4 mm [.157 in]

Tip style data

No

Tip style: 19 90° inverse cone, slotted, self cleaning Tip diameter: 1.8 mm [.070 in] Tip style surface: A gold Tip style material: 3 CuBe

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-112 319 180 A 1502 M

Item GKS-112-1778





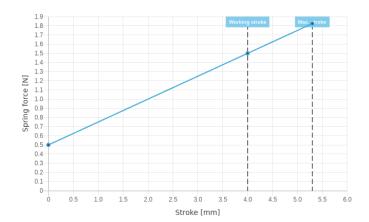

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**

