Spring-loaded test probe

GKS-113 303 230 A 0602 M

Item GKS-113-0828







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





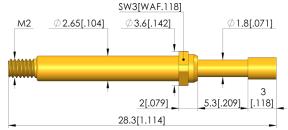



General data

RoHS-compliant:

Screw-in test probe Product group: Sub-product group: Screw-in test probe GKS-113 M screw-in Series: Grid: 4 mm [157 mil] Contacting from: Pin, posts Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Non-rotating: Screw-in torque: 10 - 20 cNm [.885 - 1.77 lbf·in] Compatible receptacle(s): KS-113 M - 40 °C [- 104 °F] Min. temperature: + 80 °C [+ 176 °F] Max. temperature:

Electrical data

5 A Current load capacity / rated current: <30 mOhm Typical resistance (Ri):

Mechanical data

28.3 mm [1.11 in] Total length: Barrel diameter: 2.65 mm [.104 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.21 N [.755 ozf] Collar height: Spring force at working stroke: 0.6 N [2.15 ozf] Recommended working stroke: 4 mm [.157 in]

Tip style data


RoHS-3;6c

Tip style: 03 inverse cone Tip diameter: 2.3 mm [.090 in] Tip style surface: A gold Tip style material: 3 CuBe

Spring-loaded test probe GKS-113 303 230 A 0602 M

Item GKS-113-0828



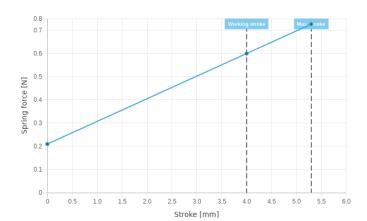

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

