# Spring-loaded test probe

## GKS-427 305 064 A 1502 M

Item GKS-427-0022






- Short-stroke screw-in test probes for applications with possible vibrations or unwanted lateral and axial forces (migration of the test probes out of the receptacles is safely prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





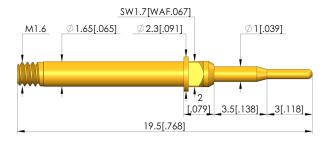



### **General data**

Product group: Sub-product group: Series:

Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-427 M screw-in

2.54 mm [100 mil] Pad, Female connector

> Yes Screw-in

Yes No

KS-427 M

3 - 5 cNm [.265 - .442 lbf·in]

- 40 °C [- 104 °F]

+80 °C [+176 °F] RoHS-3;6c **Electrical data** 

Current load capacity / rated current:

Typical resistance (Ri):

**Mechanical data** 

Total length: Barrel diameter: Maximum stroke:

Spring pre-load: Collar height:

Spring force at working stroke:

19.5 mm [.767 in] 1.65 mm [.064 in] 4.5 mm [.177 in] 0.25 N [.899 ozf] 1.5 N [5.39 ozf]

8 A

<20 mOhm

Recommended working stroke: 3.5 mm [.137 in]

Tip style data


Tip style: Tip diameter: Tip style surface: Tip style material: 05 bullet-nosed (full radius) 0.64 mm [.025 in] A gold 3 CuBe

# Partner for Future Technology

# Spring-loaded test probe GKS-427 305 064 A 1502 M

Item GKS-427-0022



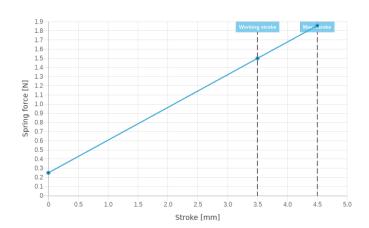

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

