

# Radio-frequency probe

## HFS-819 355 051 A 12742 V8-Z

Item HFS-819-0026





GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

- For testing HSD connectors (Rosenberger)
- Used for the transmission of high-speed data for navigation and entertainment in automotive engineering.
- For high data rates, e.g. LVDS signals, GVIIF or USB
- Freely movable bearing
- Installation: press directly into the mounting plate or via flange mounting
- Cable interface optionally with screw-in INGUN plug

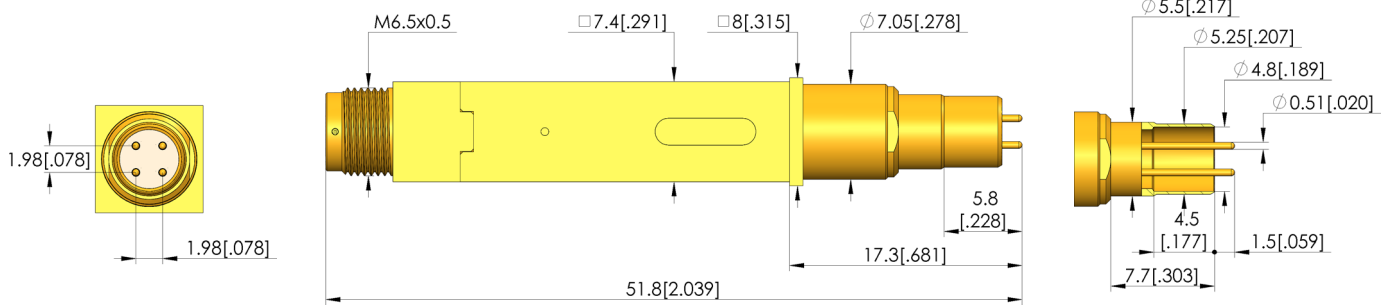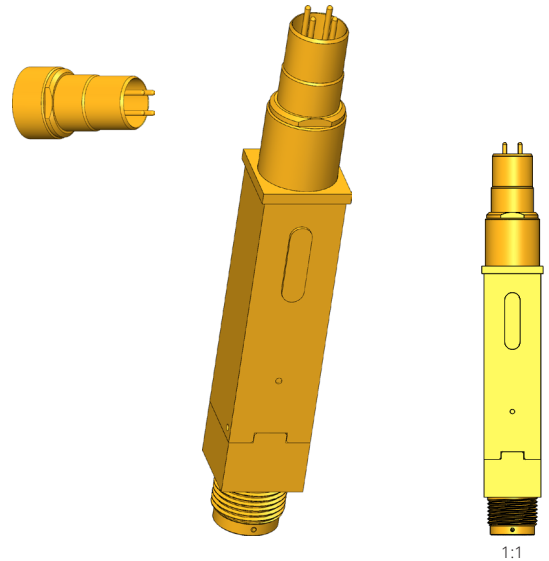

### General data

Product group:	HFS radio-frequency test probes
Series:	HFS-819
Sub-series:	HFS-819 Z plug screw-in
Grid:	12 mm [472 mil]
DUT / contact:	HSD
Installation type:	Plug-in
DUT interface gender :	F signal conductor female / socket
Floating mount:	No
Non-rotating:	Yes
Continuous plunger:	Yes
Interface of compatible assembly:	SE-819 V5-Z plug, screw-in, for HFS-819
Compatible assembly interface gender :	F signal conductor female / socket
Recommended torque at interface:	10 cNm [.885 lbf·in]
KS sub-series:	HAS-819, HAS-819D8 160 floating version
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

### Outer conductor data


Outer conductor tip style:	42 centring for inner side of plug connector
Outer conductor tip style diameter:	5.3 mm [.208 in]
Spring force of entire outer conductor at working stroke:	7.5 N [26.9 ozf]
Outer conductor working stroke:	5 mm [.196 in]
Outer conductor maximum stroke:	6 mm [.236 in]
Exchangeable outer conductor:	KO-819142525A-V8
Outer conductor max. current load capacity:	10 A

AUTOMOTIVE

# Radio-frequency probe

## HFS-819 355 051 A 12742 V8-Z

Item HFS-819-0026



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### Inner conductor data

Inner conductor tip style:	55 bullet-nosed, special length
Inner conductor tip style diameter:	0.51 mm [.020 in]
Inner conductor tip style material:	3 CuBe
Inner conductor tip style surface:	A gold
Number of inner conductors:	4 2 differential pair
Exchangeable inner conductor:	GKS-051-0039
Inner conductor working stroke:	2 mm [.078 in]
Spring force of each inner conductor at working stroke:	1.3 N [4.67 ozf]
Inner conductor maximum stroke:	3.7 mm [.145 in]
Inner conductor max. current load capacity:	3 A

### Electrical data

Impedance:	100 Ohm
Max. data rate:	1.5 Gbit/s
Dielectric strength:	1.2 kV

### Mechanical data

Total spring force at working stroke:	12.7 N [45.6 ozf]
Total length:	51.8 mm [2.03 in]
Barrel diameter:	7.4 mm [.291 in]
Installation height without receptacle:	17.3 mm [.681 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/24\_GB

Learn more about  
Radio-frequency test probes



AUTOMOTIVE

ingun.com