

High-current probe HSS-118 317 175 A 0802 M

Item HSS-118-0149



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group	High-current test probe
Sub-product group	Standard HSS (screw-in)
Series	HSS-118 M screw-in
Grid	2.54 mm [100 mil]
Contacting from	Pad, Via, Female connector
Magnetic	Yes
Installation type	Screw-in
Quick-exchange system	Yes
Adjustable installation height	No
Non-rotating	No
Screw-in torque	3 - 5 cNm [.265 - .442 lbf-in]
Compatible receptacle(s)	KS-112 M
Min. temperature	- 100 °C [- 212 °F]
Max. temperature	+ 200 °C [+ 392 °F]
RoHS-compliant	RoHS-3;6c

Electrical data


Current load capacity / rated current	5 A
Typical resistance (Ri)	<10 mOhm

Mechanical data


Total length	35.8 mm [1.40 in]
Barrel diameter	1.65 mm [.064 in]
Maximum stroke	5.3 mm [.208 in]
Spring pre-load	0.24 N [.863 ozf]
Collar height	02
Spring force at working stroke	0.8 N [2.87 ozf]
Recommended working stroke	4 mm [.157 in]

Tip style data

Tip style	17 hexagonal pyramid with cutting edges, self-cleaning
Tip diameter	1.75 mm [.068 in]
Tip style surface	A gold
Tip style material	3 CuBe

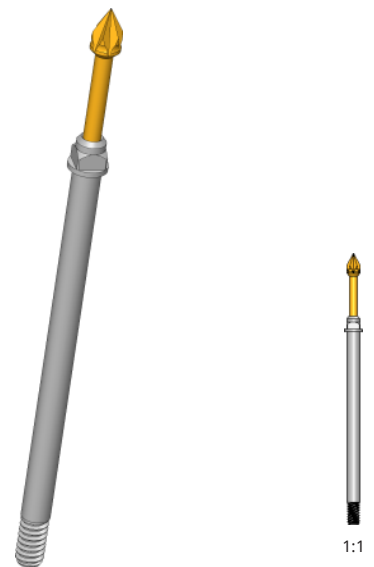

1:1

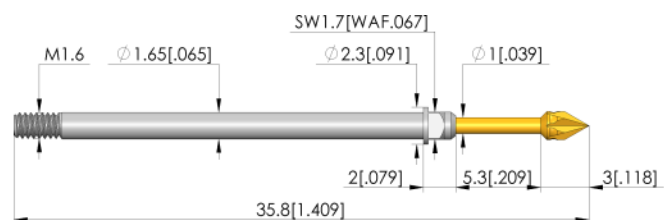

HIGH-CURRENT TEST PROBE


High-current probe

HSS-118 317 175 A 0802 M

Item HSS-118-0149



ingun[®]
Partner for Future Technology

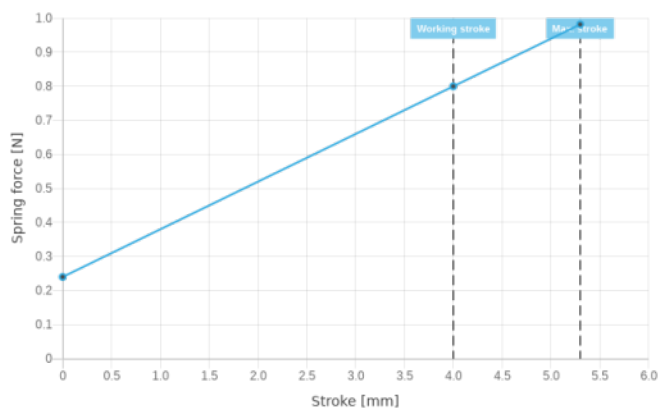

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/23 EN

Learn more about
High-current test probe



[ingun.com](https://www.ingun.com)

HIGH-CURRENT TEST PROBE