

IB08C127
INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, M8x1 33long, Flush, Sn: 2, 10-30V DC, Two-wire
NO, Cable 2m PVC, IP67, Brass Nickel-plated


MECHANICAL FEATURES

Active area material of sensor	PBT
Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 70 °C
Cable infeed	Axial
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing coating	Nickel-plated
Housing material	Brass
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Flush
Number of cores	2
Pressure-proof	-
Sensor length	33 mm
Thread pitch	1 mm
Thread size, metric	8

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	15 %
No-load current	3 mA
Norm measuring plate	8x8x1
Rated switching current	100 mA
Relative repeat accuracy	2 %
Residual ripple	10 %
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	2 mm
Switching frequency	2500 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	Two-wire
Voltage drop	5 V

ELECTRICAL FEATURES

Voltage type	DC
With monitoring function of downstream devices	-


Other

Packaging dimensions	100mm x 12.0mm x 120mm
Shipping weight	0.04kg
Tariff code	85365019

Classification

ipf product group	700
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

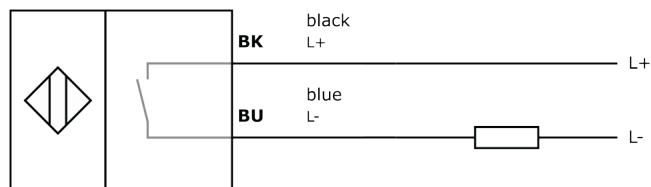

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.