

## IO120106

## INDUCTIVE SENSORS • FULL-METAL HOUSING

sensor inductive, all-steel, M12x1 50long, Non-flush, Sn: 10, 10-30V DC, 85°C, PNP NO, Cable 2m PUR (Polyurethane), IP68, Stainless steel 1.4305, factor 1



## MECHANICAL FEATURES

Active area material of sensor	Stainless steel 1.4305
Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 85 °C
Cable infeed	Axial
Cable length	2 m
Degree of protection (IP)	IP68
Design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Material independent sensors (factor 1)	+
Material of cable sheath	PUR (Polyurethane)
Material thickness	0.4 mm
Mechanical mounting condition for sensor	Non-flush
Number of cores	3
Pressure resistance	80 bar
Pressure-proof	+
Sensor length	50 mm
Thread length	45 mm
Thread pitch	1 mm
Thread size, metric	12
Wire cross section	0.34 mm <sup>2</sup>

## ELECTRICAL FEATURES

Cascadable	-
Correction factor (aluminum)	1
Correction factor (brass)	1.4
Correction factor (copper)	0.8
Correction factor (St37)	1
Correction factor (stainless steel V2A: 1mm)	0.15
Correction factor (stainless steel V2A: 2mm)	0.8
Hysteresis	15 %
Max. line length	300 m
No-load current	10 mA
Norm measuring plate	30x30x1

## ELECTRICAL FEATURES

Rated switching current	200 mA
Readiness delay	10 ms
Relative repeat accuracy	5 %
Residual ripple	20 %
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	10 mm
Switching frequency	400 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	+
With LED display (functional reserve)	+
With monitoring function of downstream devices	-

## OTHER FEATURES

Harsh environmental conditions	+
Hygienic and wet area	+
Metallic sensor surface	+
Oil and cooling lubricants	+


## Other


Packaging dimensions	70mm x 40mm x 125.0mm
Shipping weight	0.11kg
Tariff code	85365019

## Classification

ipf product group	205
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

## Connection

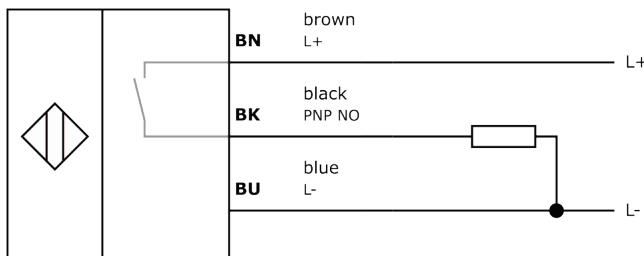

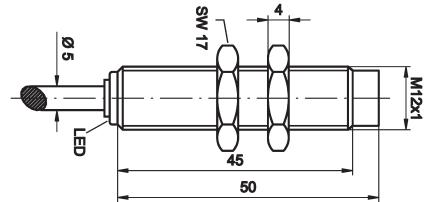**Dimensional drawing****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.