

KB12A714
CAPACITIVE SENSORS • NORM SWITCHING DISTANCE

sensor capacitive, M12x1 76long, Flush, Sn: 6, 10-35V DC, PNP NO,
Connector M12, IP67, Stainless steel, LED, Manual adjustment


MECHANICAL FEATURES

Active area material of sensor	Polytetrafluorethylene (PTFE)
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing material	Stainless steel
Mechanical mounting condition for sensor	Flush
Pressure-proof	-
Sensor length	76 mm
Thread pitch	1 mm
Thread size, metric	12

ELECTRICAL FEATURES

Cascadable	-
Rated switching current	250 mA
Reverse polarity protection	+
Setting procedure	Manual adjustment
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 35 V
Switching distance	2 mm
Switching distance (MAX)	6 mm
Type of electrical connection	Connector M12
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage type	DC
With LED display	+
With monitoring function of downstream devices	-

OTHER FEATURES

Level detection	+
-----------------	---


Other

Packaging dimensions	100mm x 20mm x 120mm
Shipping weight	0.03kg
Tariff code	85365019

Classification

ipf product group	700
eClass 8.0	27270102
eClass 9.0	27270102
eClass 9.1	27270102
ETIM-5.0	EC002715
ETIM-6.0	EC002715
ETIM-7.0	EC002715

Connection

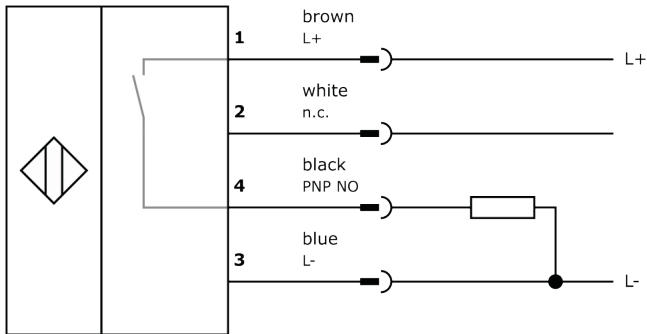

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.