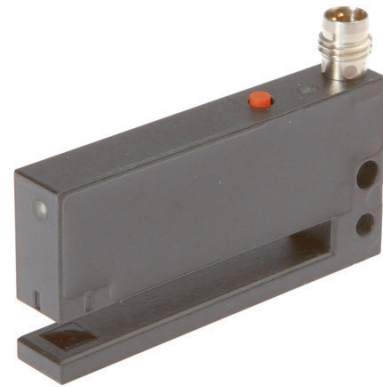


OG05057A
OPTICAL SENSORS • FORKED LIGHT BARRIERS

sensor optical, fork, 28x10x60mm, fork width 5mm, 10-35V DC, 1x PNP/NPN NC/NO, Connector M8 4pin, IP67, Zinc die-cast+Plastic, Infrared light, 3kHz pulsed, Teach in, remote-teach


MECHANICAL FEATURES

Ambient temperature	-10 °C ... 60 °C
Degree of protection (IP)	IP67
Design	Cuboid
Diameter detection	-
Fork depth	5 mm
Fork light barrier design	Furcate
Fork width	5 mm
Housing material	Zinc die-cast
Installation bracket	-
Material of optical surface	Plastic
Sensor height	28.5 mm
Sensor length	10 mm
Sensor width	60 mm

ELECTRICAL FEATURES

Analog output 0 V ... 10 V	-
Analog output 4 mA ... 20 mA	-
Connection to amplifier	-
Decay time	0.17 ms
Dynamic switching output	-
Equipment protection class	Protection class 3
Hysteresis	0.15 mm
No-load current	35 mA
Number of pins	4
Number of switching outputs	1
Operating voltage	10 V ... 35 V
Rated switching current	200 mA
Relative repeat accuracy	0.03 mm
Repeatability +/-	30 µm
Response time	0.17 ms
Scanning function	Light-/dark-on mode
Setting procedure	Teach in, remote-teach
Switching frequency	3000 Hz

ELECTRICAL FEATURES

Type of electrical connection	Connector M8
Type of switching function	Normally closed contact/normally open contact
Type of switching output	PNP/NPN
Type of the forked light barrier	Standard
Voltage drop	2 V
Voltage type	DC
With communication interface, analog	-
With communication interface, RS-232	-
With other analog output	-
With time function	-

OPTICAL FEATURES

Min. object size	0.5 mm
Resolution	500 µm
Light beam form	Point
Pulsed light source	+


Other

Packaging dimensions	75.0mm x 17.0mm x 95.0mm
Shipping weight	0.06kg
Tariff code	85365019

Classification

ipf product group	110
eClass 8.0	27270909
eClass 9.0	27270909
eClass 9.1	27270909
ETIM-5.0	EC002720
ETIM-6.0	EC002720
ETIM-7.0	EC002720

Connection

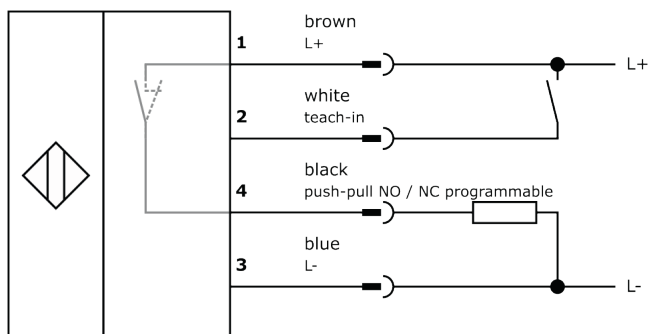

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.