

Receptacle

KS-215 M1.6 E05-F-R

Item KS-215M1.6E05-F-R




GO TO PRODUCT


ingun[®]

Partner for Future Technology

INGUN SELECTION

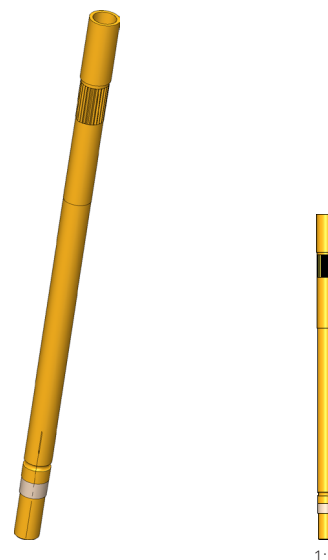

1:1

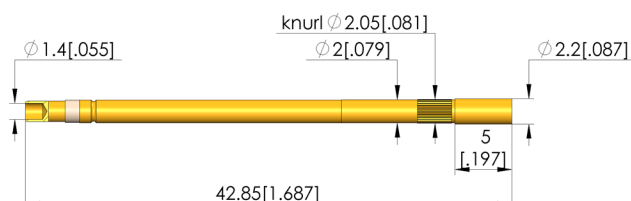

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-215
KS-215 M screw-in version
Plug / open
No
Gold
2.2 mm [.086 in]
5 mm [.196 in]
Yes
yes (< 1 ccm / min)
RoHS-3;6c

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:

2.00 - 2.02 mm [.078 - .079 in]
2.00 - 2.02 mm [.078 - .079 in]

Mechanical data

Total length:
Outer diameter:

42.9 mm [1.68 in]
2 mm [.078 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
Test probes



ingun.com