

Home - Fischerelektronik - LA 21

fischerelektronik.de/web_fischer/en_GB/VA/LA21300230/datasheet.xhtml

Features

width: 92 mm

height: 93 mm

length: 300 mm

thermal resistance: 0.19 - 0.078 K/W



surface:

- raw degreased aluminium (by the metre raw aluminium)
- mounting area(s) milled flat

operating voltage of the fan motor:

- 24 V DC
- 230 V AC

Technical Drawing

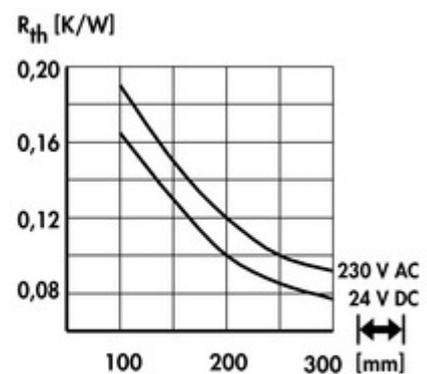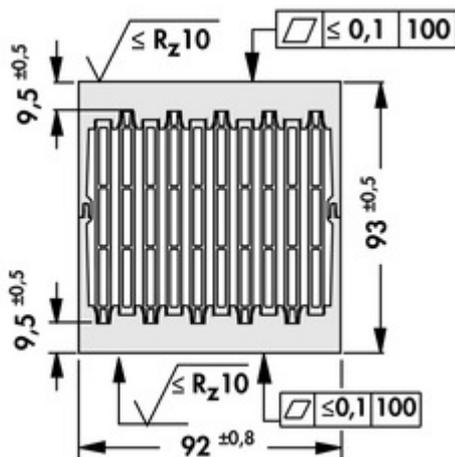

Fan

type: ebmpapst 3314 NHH

| | |
|----------------------------------|-----------------------------------|
| dimensions: | 92x92x32 mm |
| tension: | 24 V DC |
| power inout: | 3.4 W |
| max. air volume: | 107 m ³ /h |
| temperature range: | -20°C... 75°C |
| speed: | 3,450 min ⁻¹ |
| noise level: | 42 dB(A) |
| weight: | 190 g |
| failure rate (L ₁₀): | L ₁₀ > 57,500 h (40°C) |
| type: | ebmpapst 3656 |
| dimensions: | 92x92x38 mm |
| tension: | 230 V AC |
| power inout: | 12 W |
| max. air volume: | 75 m ³ /h |
| temperature range: | -40°C... +75°C |
| speed: | 2,700 min ⁻¹ |
| noise level: | 37 dB(A) |
| weight: | 420 g |
| failure rate (L ₁₀): | L ₁₀ > 52,500 h (40°C) |

