



Image may differ from product. See technical specification for details.

NJ 202 ECP

Single row cylindrical roller bearing, NJ design

Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and one on the inner ring, NJ design bearings can accommodate axial displacement in one direction. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.

- High radial load carrying capacity
- Low friction
- Long service life
- Locate the shaft axially in one direction
- Separable design

Overview

Dimensions

Bore diameter	15 mm
Outside diameter	35 mm
Width	11 mm

Properties

Bearing part	Complete bearing
Axial displacement capability	In one direction
Number of rows	1
Locating feature, bearing outer ring	None
Bore type	Cylindrical
Cage	Non-metallic
Number of flanges, outer ring	2
Number of flanges, inner ring	1
Loose flange	None
Radial internal clearance	CN
Tolerance class	Normal
Coating	Without
Sealing	Without
Lubricant	None
Relubrication feature	Without


Performance

Basic dynamic load rating	12.5 kN
Basic static load rating	10.2 kN
Reference speed	22 000 r/min
Limiting speed	26 000 r/min

Logistics


Product net weight	0.048 kg
UNSPSC code	31171505

Technical specification

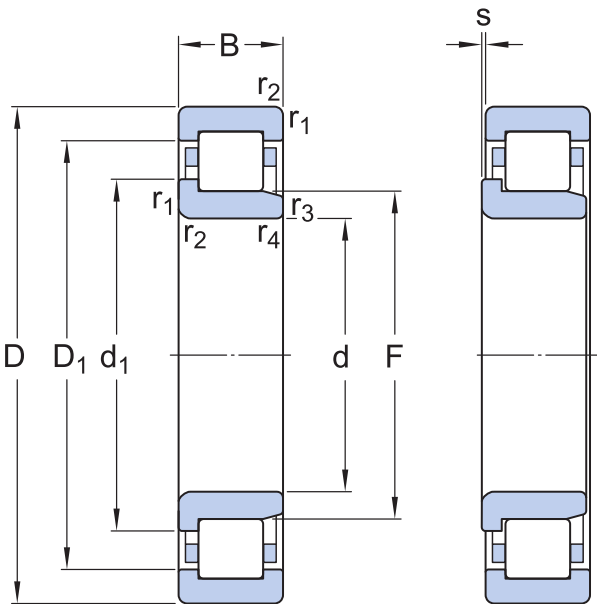

Dimensions

d	15 mm	Bore diameter
D	35 mm	Outside diameter
B	11 mm	Width
d ₁	≈ 21.9 mm	Shoulder diameter of inner ring
D ₁	≈ 27.7 mm	Shoulder diameter of outer ring
F	19.3 mm	Raceway diameter of inner ring
r _{1,2}	min. 0.6 mm	Chamfer dimension
r _{3,4}	min. 0.3 mm	Chamfer dimension
s	max. 1 mm	Permissible axial displacement

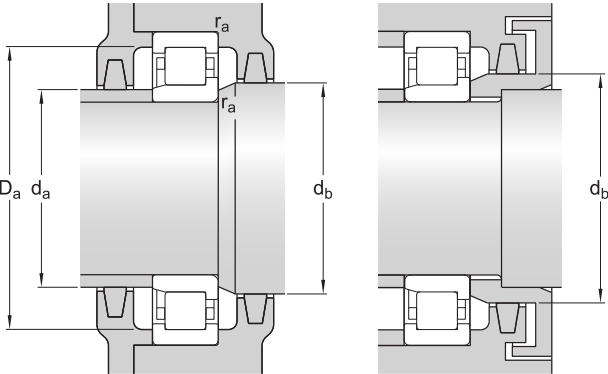

Abutment dimensions

d _a	min. 18.2 mm	Diameter of spacer sleeve
d _a	max. 18.4 mm	Diameter of spacer sleeve
d _b	min. 23 mm	Diameter of shaft abutment
D _a	max. 31.3 mm	Diameter of housing abutment
r _a	max. 0.6 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	12.5 kN
Basic static load rating	C ₀	10.2 kN
Fatigue load limit	P _u	1.22 kN
Reference speed		22 000 r/min
Limiting speed		26 000 r/min
Minimum load factor	k _r	0.15
Limiting value	e	0.2
Calculation factor	Y	0.6

Mass

Mass	0.048 kg
------	----------

