


Technical data sheet

Joint connector GSV 34

Item no. 6016634

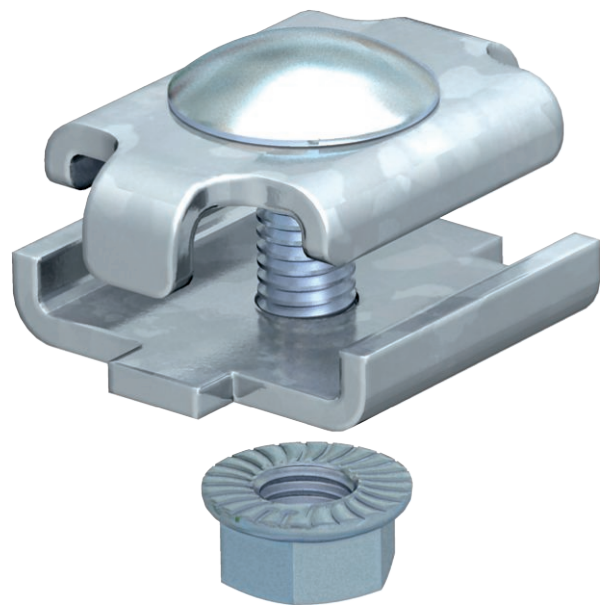

Screwed version of joint connector for mesh cable trays.



St	Steel
FT	Hot-dip galvanised

Additional product text, instruction	Including FRS M6 x 20 bolt with flange nut.
Additional product text 1	Figure: Positioning and quantity of mesh cable tray connectors. 50–150 mm = 2 units 200–300 mm = 3 units 400–450 mm = 4 units 500–600 mm = 5 units

Master data

Item no.	6016634
Type	GSV 34 FT
Description 1	Joint connector
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	20,00 Piece
Weight	3,15 kg/100 pc.


Technical data sheet

Joint connector GSV 34

Item no. 6016634



Technical data

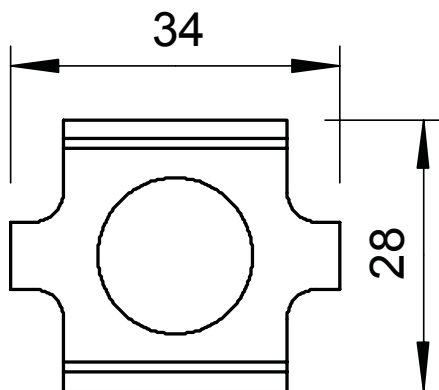

Length	34,00 mm
Width	28,00 mm
Dimension	34 x 27,5 mm
Version	Straight connector
Suitable for cable tray	☐
Suitable for mesh cable tray	☒
Suitable for cable ladder	☐
Suitable for maintaining electrical function	☐
Adjustable connector, horizontal	☐
Adjustable connector, vertical	☐
Suitable for mesh cable tray wire	3,90 - 4,90 mm
Rustproof steel, pickled	☐
Connection type	Screw connector